


## B08 Miniature Filters / Regulators

**Features:**

- 0-125 PSI adjusting range
- 5 micron element
- .4 oz. bowl
- self-relieving
- supplied with a 0-160 PSI flush mount style gauge
- maximum operating conditions:
  - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F (0°C to 52°C)**
  - metal bowl: **250 PSIG** (17.2 bar) and **32°F to 150°F (0°C to 65.5°C)**

Size	Flow (SCFM)	Transparent Bowl and Guard		Metal Bowl	
		Automatic Drain Part #	Manual Drain Part #	Automatic Drain Part #	Manual Drain Part #
1/4"	42	<b>B08-02AG</b>	<b>B08-02MG</b>	<b>B08-02AGMB</b>	<b>B08-02MGMB</b>

See pages 401 to 405 for accessories.  
SCFM ratings at 100 PSIG inlet pressure.

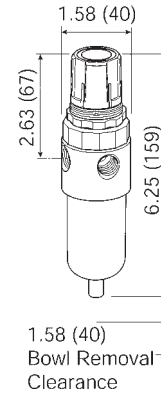

Pneumatic Accessories


## L03 Miniature Lubricators

**Features:**

- 1 oz. bowl
- adjustable oil feed
- full view sight dome
- **Do not fill under pressure. Air supply must be turned off and pressure bled from unit prior to adding oil.**
- maximum operating conditions:
  - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F (0°C to 52°C)**
  - metal bowl: **250 PSIG** (17.2 bar) and **32°F to 175°F (0°C to 80°C)**

Size	Flow (SCFM)	Transparent Bowl Part #	Metal Bowl Part #
1/8"	20	<b>L03-01A</b>	<b>L03-01AMB</b>
1/4"	20	<b>L03-02A</b>	<b>L03-02AMB</b>

SCFM ratings at 90 PSIG inlet pressure.




## L08 Miniature Lubricators

**Features:**

- .6 oz. bowl
- adjustable oil feed
- full view sight dome
- fill under pressure design
- maximum operating conditions:
  - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F (0°C to 52°C)**
  - metal bowl: **250 PSIG** (17.2 bar) and **32°F to 150°F (0°C to 65.5°C)**

Size	Flow (SCFM)	Transparent Bowl Part #	Metal Bowl Part #
1/4"	57.5	<b>L08-02A</b>	<b>L08-02AMB</b>

See pages 401 to 405 for accessories.  
See page 367 for air tool lubricant.



FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 150 PSIG inlet pressure.