



Global Cast Angle Valves

Female Inlet



Features:

- NPT inlet thread only
 - aluminum handwheel
 - working pressure: **300 PSI** at 70°F (21°C)
 - New York City Board of Standards and Appeals, approval # MEA 54-07-E
 - available finishes:
 - cast (standard)
 - polished: -P
 - chrome: -C
- minimum quantity for special thread, consult Dixon™

Inlet Female NPT	Outlet	Cast Yellow DZR Brass Part #	Price/E
1½"	1½" male NST (NH)	AV150-I	\$108.80
2½"	2½" male NST (NH)	AV250-I	222.00
NEW 2½"	2½" MNYFD	AV250NYFD-I	222.00

Grooved Inlet



Inlet Grooved	Outlet Male NST (NH)	Cast Yellow DZR Brass Part #	Price/E
2½"	2½"	AVG250F-I	\$240.70

Inlet Grooved	Outlet Female NPT	Cast Yellow DZR Brass Part #	Price/E
2½"	2½"	AVGF250-I	\$240.70

Double Female


Features:

- NPT inlet and outlet only
- aluminum handwheel
- working pressure: **300 PSI** at 70°F (21°C)
- New York City Board of Standards and Appeals, approval # MEA 54-07-E
- available finish:
 - cast (standard)
 - polished = -P
 - chrome = -C



Inlet Female NPT	Outlet Female NPT	Cast Yellow DZR Brass Part #	Price/E
1½"	1½"	AVF150-I	\$108.80
2½"	2½"	AVF250-I	222.00

Dimensions

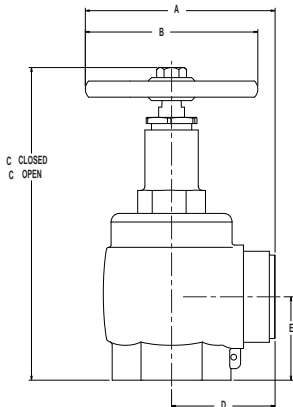

Size	A	B	C (closed)	C (open)	D	E	Wt. in Lbs.
1½"	4.13"	3.75"	6.80"	7.78"	2.25"	1.81"	4.4
2½"	5.69"	5.00"	9.00"	10.72"	3.19"	2.59"	9.5

P